




台技工業設備股份有限公司
TANGTECK EQUIPMENT INC.
 台灣桃園縣大園鄉水源路 913 號
 No.913, Shueiyuan Rd. Dayuan Township,
 Taoyuan County, Taiwan R.O.C.
 TEL: (03) 3867575 FAX: (03) 3866955

SMT/BGA N₂ REFLOW FURNACE --

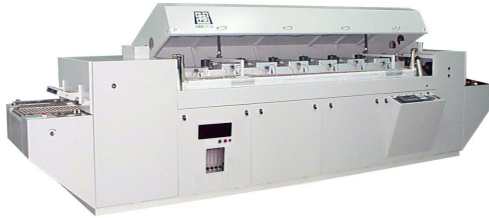

----THE MOST FLEXIBLE FURNACE OF SMT REFLOW ----

--CAN EASILY ACCOMMODATE THE BGA REFLOW PROCESS (LEADFREE COMPATIBLE) --

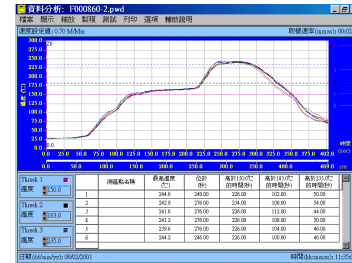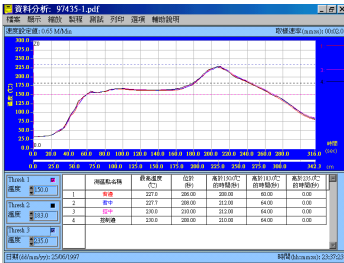

(The Profiles Are Detected by "THERMOTRACKER" Model : PRO-1000)

Model	BGA-18-M10HANO	BGA-18-M12HANO	BGA-18-M14HANO
Specification			
Overall Dimension (mm) (L X W X H) (approx.)	4600 x 1200 x 1400	5000 X 1200 x 1400	5300 x 1200 x 1400
Number of Heating Zone	5 zone	6 zone	7 zone
Power Rated , 220V,3P,60Hz (380 V,3P,4Wires is available)	31 kW	37 kW	42 kW
Max. Process Height (mm)	30	30	30
Max. Speed Transportation(cm)	20 -120	20 -120	20 -145
Max. Board Width (mm)	380	380	380
Temperature Range Of Heater(°C)	Ambient – 350	Ambient - 350	Ambient - 350

- Personal computer is options.
- CR : Furnished with both of mesh belt and chain rail, Individual control of transportation.
- The Top Heater of Reflow zone : Max. 400°C
- Specifications are subject to change without notice.