




台技工業設備股份有限公司 TANGTECK EQUIPMENT INC.

台灣桃園縣大園鄉橫峰村水源路 913 號
No.913, Shueiyuan Rd. Dayuan Township,
Taoyuan County, Taiwan
TEL:886- 3- 3867575
FAX:886- 3- 3866955
http://www.tangteck.com.tw


THERMOTRACKER®



PRO-600-SERIES

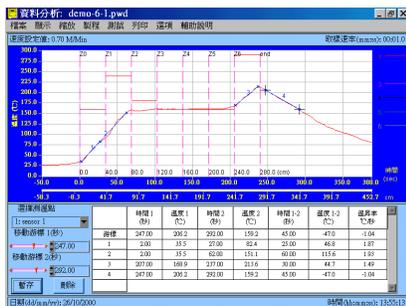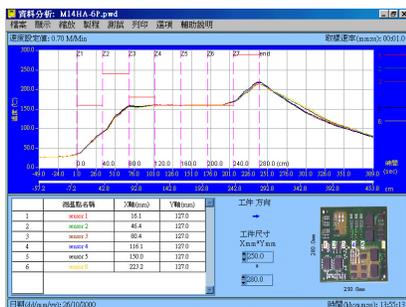

PRO-1000-SERIES

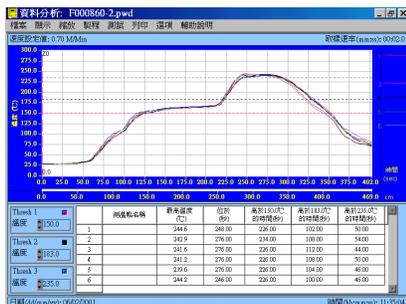

型號	PRO-1000-			PRO-600-		
	4P	6P	8P	4P	6P	8P
機台尺寸 (LxWxH) (mm)	4P, 6P : 173x104x16 8P : 173x104x18			4P, 6P : 187x52x15 8P : 187x68x15		
隔熱盒尺寸 (LxWxH) (mm)	4P, 6P : 204x115x25 or 30 8P : 204x115x30			4P, 6P : 220x64x25 or 30 8P : 220x80x25 or 30		
過溫保護	內部溫度超過85°C自動斷電			超過105°C自動斷電		
測溫範圍	0-1000 °C			0-600 °C		
精確度	±1°C			±0.5°C		
解析度	0.5°C			0.2°C		
電源	6V (AAA)電池包,耐溫90°C			6V (AAAA) x 4,耐溫90°C		
熱電偶型式	K TYPE					
記憶量	4000 筆資料					
取樣速率	0.1秒至1小時,由軟體設定					
通訊	RS-232					
電池壽命	依取樣速率而定,於0.1秒取樣速率下可連續運作200小時					
軟體	中/英文,具分析能力					