




台技工業設備股份有限公司
TANGTECK EQUIPMENT INC.

台灣桃園縣大園鄉水源路 913 號
 No.913,Shueiyuan Rd. Dayuan Township,
 Taoyuan County ,Taiwan R.O.C.

TEL:886-3-3867575 FAX:886-3-3866955

<http://www.tangteck.com.tw>

PLOYMER THICKFILM CURING FURANCE (高分子厚膜固化爐)

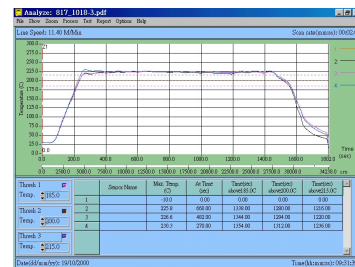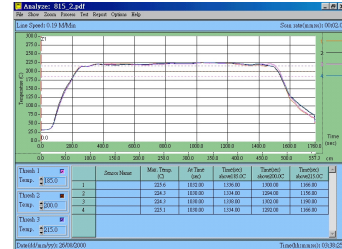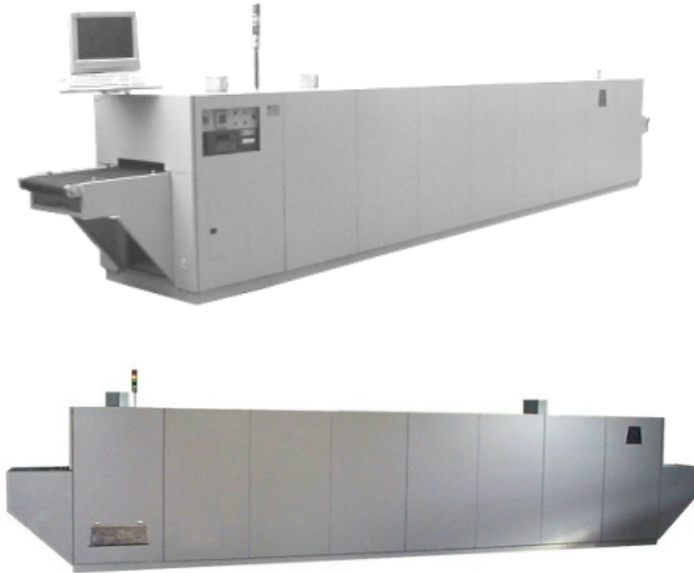

Specification	Model	PTF-18-		PTF-25-		PTF-36-
		M10Z	M15Z	M10Z	M15Z	M19Z
Overall Dimension (mm) (approx.)		5275(L) 1000(W) 1400(H)	6900(L) 1000(W) 1400(H)	5275(L) 1200(W) 1400(H)	6900(L) 1200(W) 1400(H)	8050(L) 1500(W) 1400(H)
Power Rated (Input:220V,3P,60Hz or 380 V,3P,4Wires)		28KVA	39KVA	49KVA	69KVA	110KVA
Number of Heating Zone		10	15	10	15	19
Width of mesh belt (mm)		455		635		914
Max. Process Height(mm)		25		25		25
Max. Speed of Transportation(cm/min)		23.5	32	23.5	32	34
Temperature Range Of Set point		Ambient - 450°C				

- Personal computer is options.
- 18、25、36: Furnished with only mesh belt transportation.
- Specifications are subject to change without notice.