

台技工業設備股份有限公司
TANGTECK EQUIPMENT INC.



台灣桃園縣大園鄉水源路 913 號
No.913,Shueiyuan Rd. Dayuan Township,
Taoyuan County ,Taiwan R.O.C.

TEL:886-3-3867575 FAX:886-3-3866955
http://www.tangteck.com.tw

SMD 迴錫爐
SMD REFLOW FURNACE



----THE MOST FLEXIBLE FURNACE OF SMT REFLOW ----
----CAN EASILY ACCOMMODATE THE SMD REFLOW PROCESS----

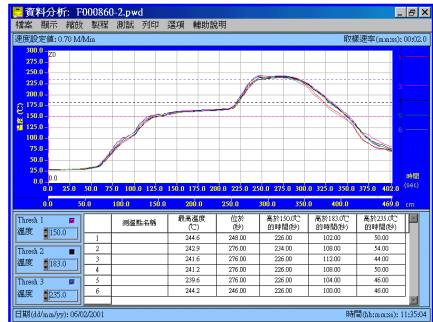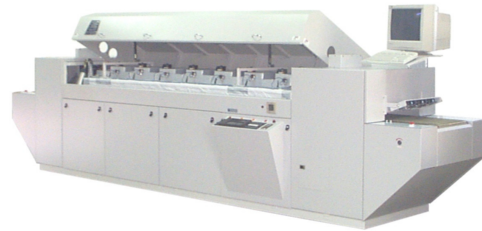

(The Profiles Are Detected by "THERMOTRACKER" Model : PRO-1000)



"S" type controller



"M" type controller

Specification	Model	SMD-CR or SMD-18					
		-S-		-M-			
		8HAO	10HAO	9HAO	12HAO	10HAO	14HAO
Power rated (kw)		27	31	31	37	34	42
Number of controlled heaters		8	10	9	12	10	14
Number of heating zones		5 zone		6 zone		7 zone	
Overall dimension (mm) (approx.) (L x W x H)		4600 x 1200 x 1400		4900 x 1200 x 1400		4900 x 1200 x 1400	
Chain rail speed of transportation(cm)		20 - 100		20 - 100		20 - 145	
Input power		220 V, 3 P, 3 Wires or 380 V, 3P, 4 Wires ; 50 / 60 Hz is available.					
Max. process height (mm)		25					
Max. board width (mm)		320					
Temperature range of setting (°C)		Ambient - 350					

1. "CR" : Furnished with both of mesh belt and chain rail, Individual control of transportation.; "18" Only mesh belt. Conveyor (width : 18")
2. "M" type controller can link with PC. ; "S" controller cannot link with PC. (PC. is an option or built by customer.)
3. Specifications are subject to change without notice.