


台技工業設備股份有限公司
TANGTECK EQUIPMENT INC.




台灣桃園縣大園鄉水源路 913 號
 No.913, Shueiyuan Rd. Dayuan Township,
 Taoyuan County, Taiwan R.O.C.
TEL:886-3-3867575 FAX:886-3-3866955
<http://www.tangteck.com.tw>

SMT N₂ REFLOW FURNACE --

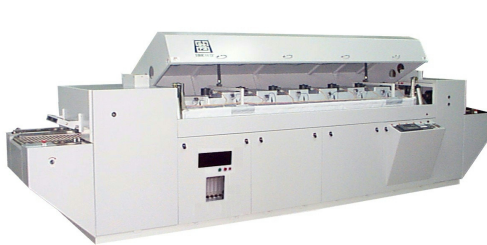

----THE MOST FLEXIBLE FURNACE OF SMT REFLOW ----

---CAN EASILY ACCOMMODATE THE BGA REFLOW PROCESS (LEADFREE COMPATIBLE) --

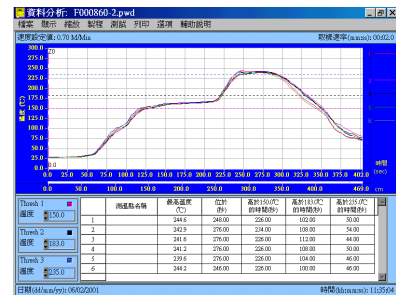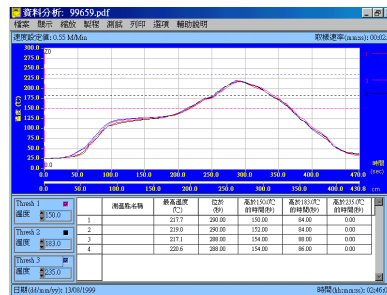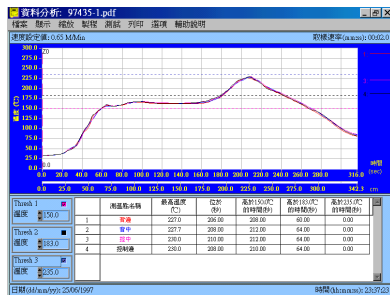

(The Profiles Are Detected by "THERMOTRACKER" Model : PRO-1000)

Specification	Model	SMD-18- or SMD-CR-		
		M12HANO	M14HANO	M16HANO
Overall Dimension (mm) (L X W X H) (approx.)		4900 X 1200 x 1400	5570 x 1200 x 1400	5850 x 1200 x 1400
Number of Heating Zone		6 zone	7 zone	8 zone
Power Rated , 220V,3P,60Hz (380 V,3P,4Wires is available)		37 kW	43 kW	49 kW
Max. Process Height (mm)		25	25	25
Max. Speed Transportation(cm)		20 -150	20 -150	20 -150
Max. Board Width (mm)		320	320	320
Temperature Range Of Heater(°C)		Ambient - 350	Ambient - 350	Ambient - 350

- Personal computer is options.
- CR" : Furnished with both of mesh belt and chain rail, Individual control of transportation.; "18" Only mesh belt.(width : 18")
- Specifications are subject to change without notice.