


台技工業設備股份有限公司  
**TANGTECK EQUIPMENT INC.**

台灣桃園縣大園鄉水源路 913 號  
 No.913,Shueiyuan Rd. Dayuan Township,  
 Taoyuan County ,Taiwan R.O.C.

**TEL:886-3-3867575 FAX:886-3-3866955**  
<http://www.tangteck.com.tw>

**HIGH TEMPERATURE FIRING FURNACE (高溫燒成爐)**  
**HYBRID CIRCUIT FIRING PROCESS**

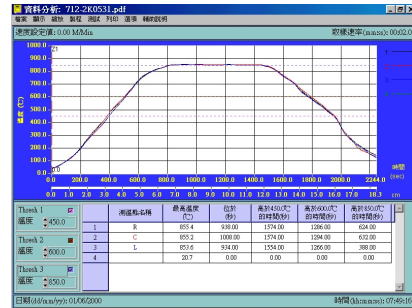

Specification	Model		HY900-18-		HY900-25-		HY900-36-	
			HY600-18-		HY600-25-		HY600-36-	
	M10Z	M15Z	M10Z	M15Z	M10Z	M15Z	M10Z	M15Z
Overall Dimension (mm) (approx.)	7340(L) 1200(W) 1400(H)	9000(L) 1200(W) 1400(H)	7570(L) 1400(W) 1500(H)	9710(L) 1400(W) 1500(H)	7570(L) 1800(W) 1560(H)	9710(L) 1800(W) 1560(H)		
Power Rated (Input:220V,3P,60Hz or 380 V,3P,4Wires )	54KVA	79KVA	75KVA	111KVA	101KVA	151KVA		
Number of Heating Zone	10	15	10	15	10	15		
Width of mesh belt (mm)	455		635		914			
Max. Process Height(mm)	50		50		50			
Max. Speed of Transportation(cm/min)	23.5	32	23.5	32	23.5	32		
Temperature Range Of Set point (°C)	HY900 : Ambient - 900 HY600 : Ambient - 650							

- Personal computer is options.
- 18、25、36: Furnished with only mesh belt transportation.
- Specifications are subject to change without notice.